


LDR 1" DEFLECTION ISOLATION RAIL SET

IP UNITS (INCHES AND POUNDS)

TYPE	L	W	A	B	D	E	F	G	H	T	Z1	Z2
1-120/820	5.75	3.00	1.50	0.50	0.44	1.63	0.81	2.00	4.32	0.23	0.50	0.38

STANDARD RATINGS		SPRING COIL			STSTEM RATED	
TYPE	SIZE	COLOR	HT.	O.D.	LOAD	DEFL.
LDR	1-120	BLUE	2.50	1.46	120	2.00
LDR	1-260	GREEN	2.50	1.46	260	2.00
LDR	1-480	GRAY	2.50	1.46	480	1.90
LDR	1-820	BROWN	2.50	1.46	820	1.90

STRUT CHANNEL OPTIONS	
OPTION	LENGTH (IN)
A	NO CHANNEL
B	24.00
C	48.00

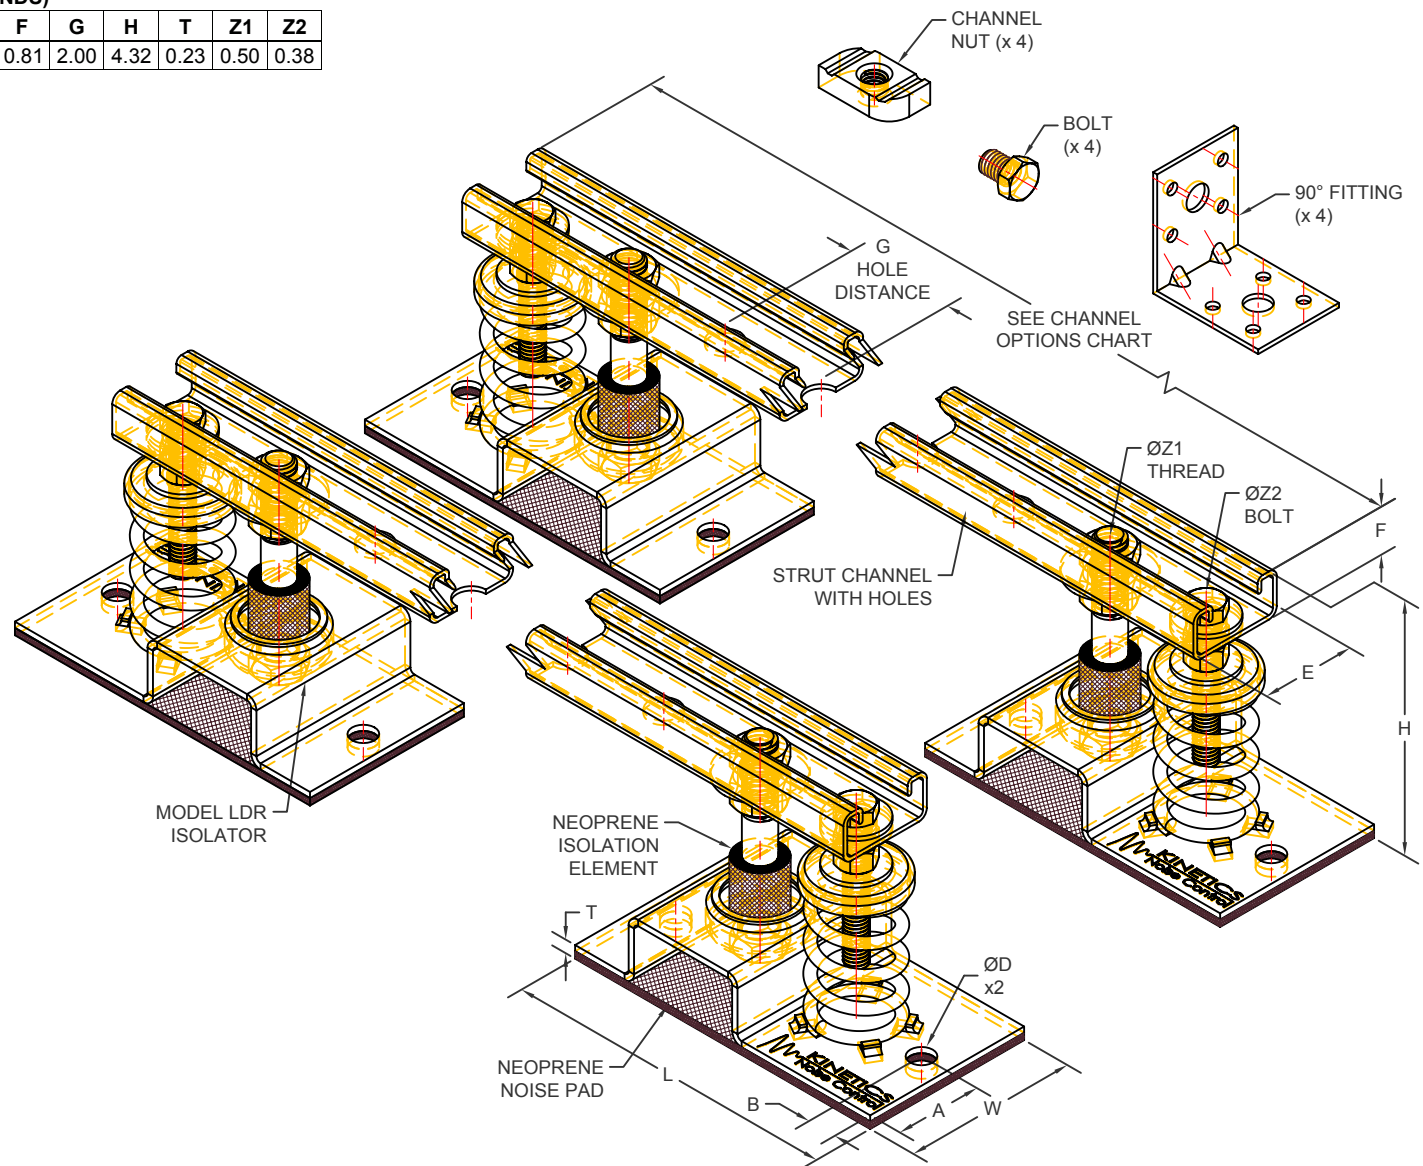

SPECIFICATIONS:

- ALL HARDWARE IS BRIGHT ZINC PLATED.
- HOUSING IS ZINC PLATED STEEL.
- SPRING COILS ARE POWDER COATED STEEL.
- ALL ELEMENTS ARE SAFE AT SOLID LOADING.
- LDR ISOLATION RAILS ARE TYPICALLY SOLD IN PAIRS.
- LDR ISOLATORS ARE DESIGNED TO BE USED WITH STANDARD UNISTRUT P4100 HS CHANNEL OR EQUAL.
- STRUT CHANNEL USES STANDARD CHANNEL NUTS WHICH CAN BE PURCHASED SEPARATELY.



KINETICS NOISE CONTROL, INC
 6300 IRELAN PL,
 DUBLIN, OH 43017 USA
 Ph: 614 889-0480, Fax: 614 889-0540
 www.kineticsnoise.com

Model:
**LDR-1-120/820
 ISOLATION SET**

By: **BB**
 Date: **01/23/17**
 Revised: **06/14/17/BB**

Drawing No:
S-01.19-10